




INSTALLATION AND SIZE MG YL-YY SINGLE-PHASE MOTOR

MOUNTING DATA FOR MG YL-YY

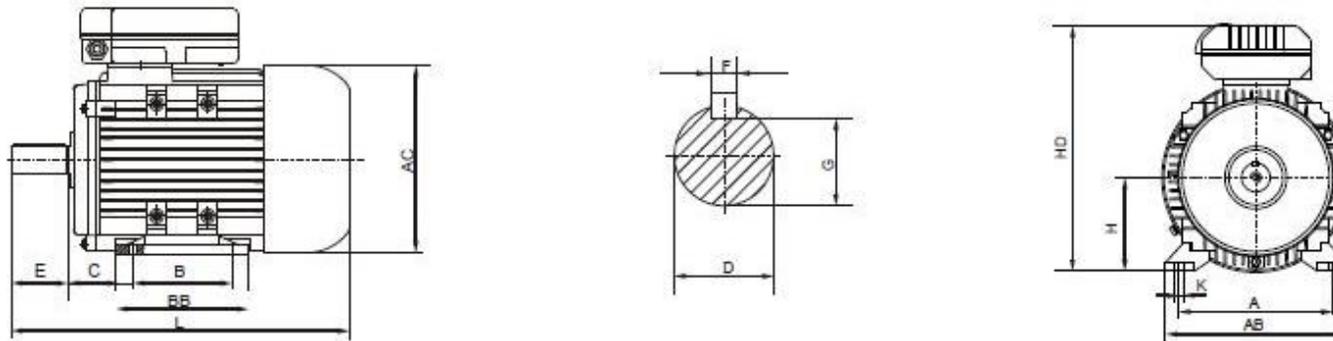


Frame with feet and end-shield with flange (IM B3)

TYPE	POLES	A	B	C	D	E	F	G	H	K	AB	BB	HD	AC	L
63	2.4	100	80	40	11	23	4	8.5	63	7	135	100	182	120	217
71	2.4	80	80	45	14	30	5	11	71	7	150	112	202	136	250
80	2.4	125	100	50	19	40	6	15.5	80	10	153	125	227	160	310
90S	2.4	140	100	56	24	50	8	20	90	10	172	156	246	175	340
90L	2.4	140	125	56	24	50	8	20	90	10	172	156	246	175	340
100L	2.4	160	140	63	28	60	8	24	100	12	200	172	250	196	425



MOUNTING DATA FOR MG YL-YY



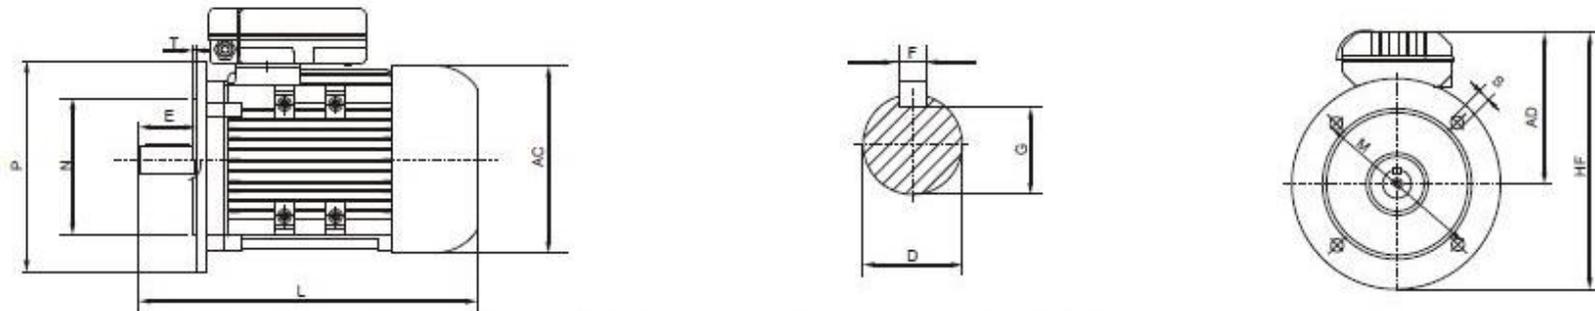


Frame with feet and end-shield with flange (IM B5)

TYPE	POLES	D	E	F	G	P	N	M	S	T	AD	HF	AC	L
63	2,4	11	23	4	8,5	140	95	115	10	3	119	189	120	217
71	2,4	14	30	5	11	160	110	130	12	3,5	131	211	136	250
80	2,4	19	40	6	15,5	200	130	165	12	3,5	147	247	160	310
90S	2,4	24	50	8	20	200	130	165	12	3,5	156	256	175	340
90L	2,4	24	50	8	20	200	130	165	12	3,5	156	256	175	340
100L	2,4	28	60	8	24	250	180	215	15	4	150	275	196	425



MOUNTING DATA FOR MG YL-YY

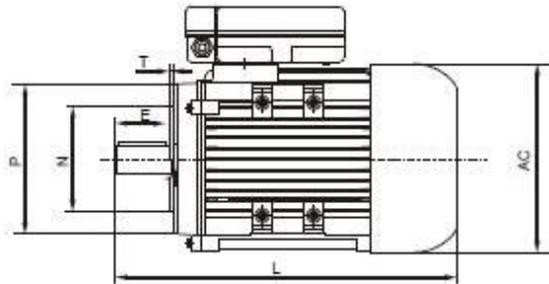

Frame with feet and end-shield with flange (IM B14)

TYPE	POLES	D	E	F	G	P	N	M	S	T	AD	HF	AC	L
63	2.4	11	23	4	8.5	140	95	115	M5	2.5	119	180	120	217
71	2.4	14	30	5	11	105	70	85	M6	2.5	131	198.5	136	250
80	2.4	19	40	6	15.5	120	80	100	M6	3.0	147	227	160	310
90S	2.4	24	50	8	20	140	95	115	M8	3.0	156	243.5	175	340
90L	2.4	24	50	8	20	140	95	115	M8	3.0	156	243.5	175	340
100L	2.4	28	60	8	24	160	110	130	M8	3.5	150	249	196	425